

manuflow




PACKAGED TERMINAL AIR CONDITIONER

Model No.		KCD-25C/Da	KCD-32C/Ba	KCR-32C/ADa	KCD-45C/Ba	KCR-45C/ADa
Refrigerant	Type	R22				
Power Supply	V/Ph/Hz	208-230/1/60				
Cooling Capacity	Btu/Hr	9600	12000	12000	15000	15000
Heating Capacity	Btu/Hr	9000	—	11000	—	14000
Electric Heating	W	3000	5000	3000	5000	3000
Dehumidification	KG/H	0.9	1.3	1.35	2.1	2.15
EER	Btu/W	10.8	10.4	10.4	9.3	9
COP	Btu/W	11	—	10.6	—	8.4
Compressor	Brand	MATSUSHITA			TOSHIBA	
Air Flow __/__/__	CFM	320/290/260	400/360/325	400/360/325	400/360/325	400/360/325
Power Input	Watt	880	1130	1140	1640	1700
Rated Current	AMP	3.9	5	5	7.13	7.39
Unit Full Load Current	AMP	17.4	22.8	18.61	21.96	20.96
Breaker Min	AMP	20	30	30	30	30
Noise Level __/__/__	dBa	45(Indoor)/69(Outdoor)				
Coil	Type	Inner groove tube				
Net Dimension	WxHxD/inch	1066x555x408mm				
Packing Dimension	WxHxD/inch	1150x615x500mm (45.27x24.21x19.69inch)				
Net Weight	KG	62	61	64	63	65
Shipping Weight	KG	71.5	70.5	73.5	72.5	74.5
Loading Capacity	Container 20'/40'/40HQ'	72/152/190				
Certificate		ETL				

MANUFLOW reserves the right to improve or change product design and specifications without notice and without incurring any obligations.

WALL SLEEVE DIMENSIONS

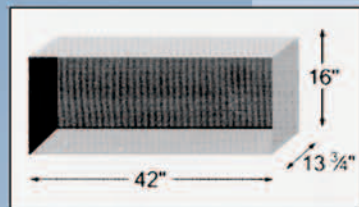

MINIMUM WALL SLEEVE OPENING

